



安装外形图 Overall dimension

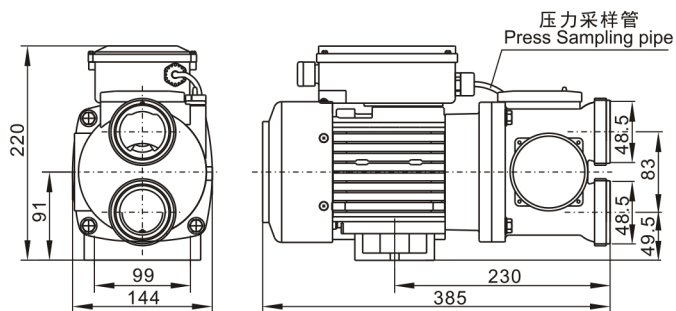

性能曲线 Performance curves

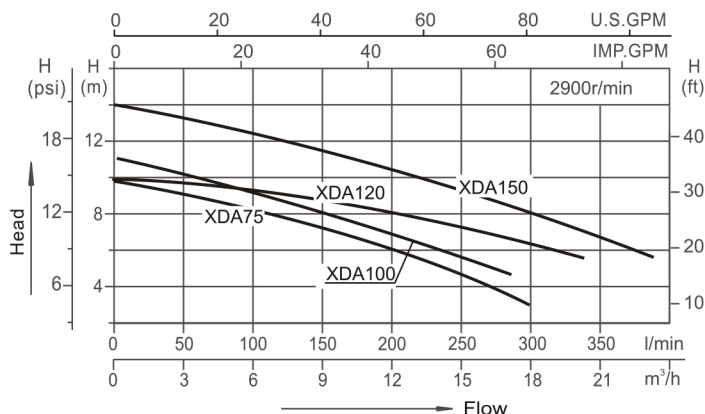

★ 该泵设有水压式无水保护,压力采样和电泵联成一体。压力开关的导通压力直接采样于电泵旋转时自身产生的压力,当泵体内没有介质时,水压开关无法导通,从而实现电泵在浴缸内没有水的情况下不能运转的目的。

- The pump connected with the hydraulic pressure no-water protection device and pressure sampling, which making the pump does not work in bath tub when it is without water.



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump




SPA池水循环
Recirculation of water in SPA equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

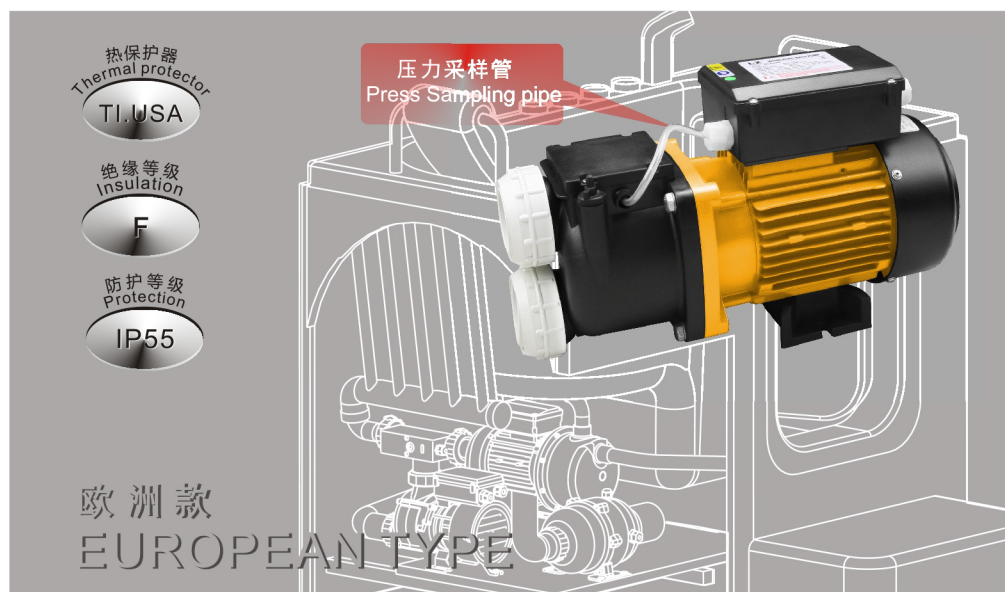

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P _i)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
XDA75	300	10	220-240/50	0.55	0.75	3.2	48.5or50	8.2	410×170×280
XDA100	290	11	220-240/50	0.75	1.0	3.8	48.5or50	8.9	410×170×280
XDA120	330	10	220-240/50	0.9	1.2	4.6	48.5or50	9.4	410×170×280
XDA150	380	14	220-240/50	1.1	1.5	5.8	48.5or50	10.4	410×170×280

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	六角头螺栓 Hexagon bolt
5	平垫圈 Washer
6	泵壳 Pump Casing
7	O形圈 O-Ring
8	上盖 Upper cover
9	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws
10	浮子 Float

序号 NO.	名称 Name
11	胶垫 Plastic spacer
12	放气堵塞 Air drain plug
13	导叶 Guide plate
14	叶轮 Impeller

序号 NO.	名称 Name
15	机械密封 Mechanical seal
16	轴套 Shaft sleeve
17	O形圈 O-Ring
18	泵盖 Pump Cover
19	电机 Motor

